

De ULTRA Mira is een professioneel display met 500 nits helderheid en een mat beeldscherm, waardoor vervelende reflecties verleden tijd zijn! Met uitgebreide mogelijkheden is het display breed inzetbaar voor onder andere kantoren en bedrijfsruimtes en geschikt voor vergaderen, videoconferencing en narrowcasting.

De kenmerken van de ULTRA Mira

- Hoge helderheid van 500 nits voor gebruik overdag
- Mat beeldscherm tegen vervelende reflecties
- Draadloos apparaat delen zonder installatie van apps of drivers
- Automatisch opstarten en afsluiten
- OPS Slot voor stand-alone Microsoft oplossing
- Formaten van 43, 55, 65, 75, 86 en 98 inch

ULTRA
BEYOND ORDINARY

4K Image – 500 Nits

Uiteraard hebben de schermen van ULTRA een Ultra HD resolutie en een hoge helderheid tot wel 500 nits. Bovendien beschikt de ULTRA Mira over een mat beeldscherm tegen vervelende reflecties: perfect voor gebruik in ruimtes met veel daglicht!

USB-C voor data + power

Een laptop met het ULTRA scherm verbinden kan met één enkele USB-C kabel. De laptop laadt op, deelt het beeld en geluid en kan zelfs worden bediend met een op de ULTRA aangesloten toetsenbord en muis.

OPS-Slot en wifi-module

Het scherm gebruiken als planbord, vergaderscherm of voor jouw eigen applicaties? Met de OPS PC maak je het scherm zo veelzijdig als een 'normale' computer. ULTRA biedt een OPS PC met een krachtige Intel i5 processor.

Iedere ULTRA Mira is uitgerust met een Wifi ontvanger, zo ben je niet afhankelijk van een bekabelde internetverbinding.

Ingebouwde lichtsensor

De displays beschikken over een ingebouwde lichtsensor. Het scherm past de helderheid automatisch aan: helderder wanneer er veel licht is en gedimd op donkere momenten. Dat is prettig voor de kijker en efficiënt in energieverbruik.



Anti-reflectie beeldscherm

Beeldschermen in kantoren en winkels worden juist overdag veel gebruikt. Lichtinval van buiten kan dan zorgen voor vervelende reflecties, waardoor de informatie op het scherm minder duidelijk of zelfs onleesbaar wordt.

De schermen van ULTRA beschikken over een ultra mat beeldoppervlak, waardoor reflecties verleden tijd zijn.



Landscape-en portrait modus

De professionele schermen van ULTRA zijn gemaakt om 24/7 aan te staan.

Alle formaten beeldschermen van Ultra zijn zowel in landscape en portret modus te gebruiken. De ingebouwde tilt-sensor zorgt ervoor dat je hiervoor niks hoeft in te stellen; wanneer je het scherm een kwartslag draait, draait het beeld automatisch mee!

Draadloos met de ULTRA Presentation Dongle

Draadloos delen met Windows, Apple en Chrome devices, zónder het installeren van apps en drivers? Het is mogelijk met de ULTRA Presentation Dongle! Je kunt zelfs meerdere laptops, tablets of telefoons tegelijk verbinden.

Met de ByTello Share App deel je draadloos een Windows, Apple of Android device via Wifi.

ULTRA Narrowcasting App ingebouwd in jouw display

Narrowcasting is dé manier om jouw boodschap te tonen. Je past content aan en plant deze vooruit, zodat het scherm automatisch de juiste boodschap op het juiste moment laat zien. Narrowcasting is inzetbaar in omgevingen als entrees, ontvangstruimtes, werkvloeren, wachtruimtes, openbare ruimtes of etalages.

Het ULTRA Narrowcasting Platform is ontwikkeld om op een eenvoudige manier content te creëren, beheren en uit te zenden via digitale displays. In het webbased platform maak je afspeellijsten, plan je content vooruit en pas je boodschappen real-time aan.

Gratis demo account?

Probeer de ULTRA Narrowcasting App nu 14 dagen gratis.

Vraag jouw ULTRA dealer naar een demo account.

Volledig automatisch plannen

Stel per dag en dagdeel in welke content je wilt tonen. Zo kun je 's ochtends andere informatie laten zien dan in de middag of avond, of wisselen tussen verschillende boodschappen op vaste momenten.

Maak templates en afspeellijsten en plan deze vooruit. De schermen starten zelf op, tonen automatisch de juiste content en schakelen op ingestelde tijden weer door.

Live updates & koppelingen met externen

Koppel realtime informatie aan jouw display, zoals social media, nieuws, dashboards, weerinformatie of wachttijden.

Maak diverse koppelingen met externe partijen, zoals Microsoft – SharePoint, Power BI, MS Teams – en vastgoed modules als Realworks, Kolibri en Max-Immo.

Alle content in één account

Beheer alle content via het webbased ULTRA-platform met één account waarin meerdere displays beheerd kunnen worden. Je kunt centraal aansturen (bijvoorbeeld vanuit een hoofdkantoor of communicatieafdeling) en tegelijkertijd lokale beheerders toegang geven als subgebruiker, zodat zij content voor hun eigen locatie of afdeling kunnen beheren.

Stel afspeellijsten in op specifieke tijden, doordeweeks en in het weekend, en plan campagnes en informatievoorziening voor de toekomst. Zo houd je controle én flexibiliteit, ook bij meerdere locaties.

Maatwerk mogelijk

Uiteraard is het op maat laten ontwerpen van templates mogelijk, volledig in de huisstijl van jouw organisatie.

Ingebouwde narrowcasting player

De ULTRA Mira is ontwikkeld voor 24/7 gebruik en beschikt over een ingebouwde media-player (SoC), waardoor geen extra kastjes of bekabeling nodig zijn.


Nieuwe content of prijswijzigingen voer je één keer door en worden automatisch naar alle gekoppelde schermen uitgerold.



ULTRA
BEYOND ORDINARY

Product Specifications
ULTRA Mira 43 inch


Display	Size	43"
	Screen Type	LCD
	Aspect Ratio	16:9
	Display Area (HxV)mm	941.1(H)×529.4(V)mm
	Resolution (HxV)	3840(H)x2160(V)
	Pixel Pitch	0.2451×0.2451mm(V)
	Back Light Unit	DLED
	Response Time	6.5ms
	Refreshing Frequency	60Hz
	Display Color	1.07B(10bit)
	Brightness （typ）	500 cd/m2
	Brightness （min）	450 cd/m2
	Contrast Ratio（typ）	4000 : 1
	High Haze	Yes, Haze 25%
	Viewing Angle	178°
	Life Time	50000 Hours
	Display Orientation	Landscape & Portrait
	Operation Time	7 daysx 24 hours
Connectors	HDMI IN	2(HDMI 2.0)
	HDMI Output	1(HDMI Daisy chain,Up to 3*3)
	Coaxial/Optical Output	Optical*1
	Audio Output	1,3.5mm
	USB 2.0	1 (F/W update / Media Play)
	USB 3.0	1 (F/W update / Media Play)
	RS232	1
	LAN(RJ45)((10M/100M/1000M))	1
	USB Type-C	1(DP1.2,PD 65W,Network Sharing(100M))
System	System Version	Android 11
	CPU	A55*4
	GPU	MaliG51 MP2
	RAM	4GB
	ROM	32GB
	UI	4K
Audio	Speaker Type	Built-in Speaker
	Power	2x10W
Slot	OPS Slot	No
	WIFI Slot	Yes, Included
Mechanisms	Bezel width(T/L/R/B) mm	9.9/9.9/9.9/9.9
	Structure	Metal Frame Metal Rear cover
	Key Location & Number	Back physical keys, 7
	Handle	-
	Dimension (L*W*H) mm	964.6×552.5×71.4mm
	Thickness (W/ wall mount) (mm)	95(WIB4722A)
	Wall-hanging Screw	M6*12mm
	VESA (Wall mounting Size)	200*200mm
	Dimension(package) L*W*H	1056×156×672mm
	Net Weight(kg)	9,9
	Gross Weight(kg)	13,85
Power	Power Requirements	100-240V~ 50/60Hz
	Standby Power	≤0.5W
	Power Consumption(Typ)	110W
	Power Consumption(Max)	250W
Accessories	Power Cord By Region	3M*1
	Remote Control	1 pcs
Environmental Conditions	Operation Temperature	0℃ - 40℃
	Operation Humidity	10% - 90%
	Storage Temperature	-20℃ -60℃
	Storage Humidity	10% - 90%
	Altitude Below	Below 5000 meters

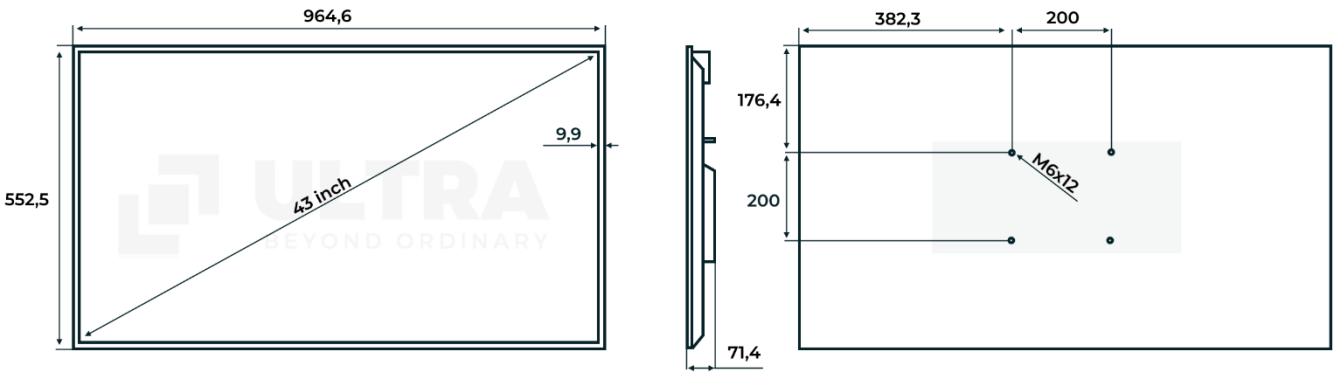


ULTRA
BEYOND ORDINARY

Product Specifications
ULTRA Mira 55 inch

Display	**Size**	55"
	Screen Type	LCD
	Aspect Ratio	16:9
	Display Area (HxV)mm	1209.6(H) ×680.4(V)
	Resolution (HxV)	3840(H)x2160(V)
	Pixel Pitch	0.315 mm(H) × 0.315 mm(V)
	Back Light Unit	DLED
	Response Time	6.5ms
	Refreshing Frequency	60Hz
	Display Color	1.07B(10bit)
	Brightness （typ）	500 cd/m2
	Brightness （min）	450 cd/m2
	Contrast Ratio（typ）	4000 : 1
	High Haze	Yes,Haze 25%
	Viewing Angle	178°
	Life Time	50000 Hours
	Display Orientation	Landscape & Portrait
	Operation Time	7 daysx24 hours
Connectors	**HDMI IN**	2(HDMI 2.0)
	HDMI Output	1(HDMI Daisy chain,Up to 3*3)
	Coaxial/Optical Output	Optical*1
	Audio Output	1,3.5mm
	USB 2.0	1 (F/W update / Media Play)
	USB 3.0	1 (F/W update / Media Play)
	RS232	1
	LAN(RJ45)((10M/100M/1000M))	1
	USB Type-C	1(DP1.2,PD 65W,Network Sharing(100M))
System	**System Version**	Android 11
	CPU	A55*4
	GPU	MaliG51 MP2
	RAM	4GB
	ROM	32GB
	UI	4K
Audio	**Speaker Type**	Built-in Speaker
	Power	2x10W
Slot	**OPS Slot**	No
	WIFI Slot	Yes, Included
Mechanisms	**Bezel width(T/L/R/B) mm**	9.9/9.9/9.9/9.9
	Structure	Metal Frame Metal Rear cover
	Key Location & Number	Back physical keys, 7
	Handle	-
	Dimension (L*W*H) mm	1233×704×71mm
	Thickness (W/ wall mount) (mm)	95(WIB4722A)
	Wall-hanging Screw	M6*12mm
	VESA (Wall mounting Size)	400*200mm
	Dimension(package) L*W*H	1332×156×819mm
	Net Weight(kg)	13,4
	Gross Weight(kg)	19,5
Power	**Power Requirements**	100-240V~ 50/60Hz
	Standby Power	≤0.5W
	Power Consumption(Typ)	150W
	Power Consumption(Max)	250W
Accessories	**Power Cord By Region**	3M*1
	Remote Control	1 pcs
Environmental Conditions	**Operation Temperature**	0℃ - 40℃
	Operation Humidity	10% - 90%
	Storage Temperature	-20℃ -60℃
	Storage Humidity	10% - 90%
	Altitude Below	Below 5000 meters

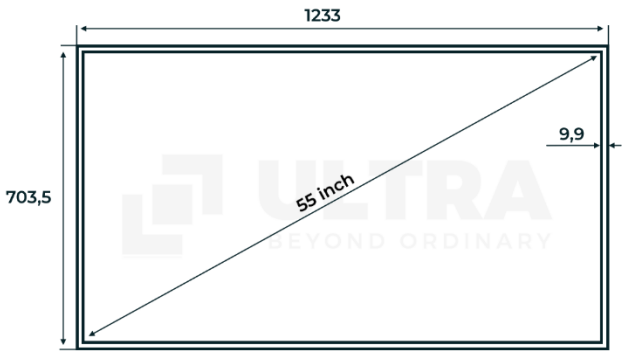

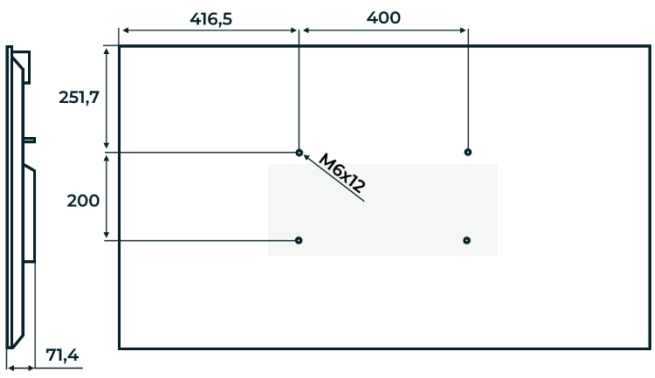



ULTRA
BEYOND ORDINARY

ULTRA
BEYOND ORDINARY

Product Specifications
ULTRA Mira 65 inch

Display	**Size**	65"
	Screen Type	LCD
	Aspect Ratio	16:9
	Display Area (HxV)mm	1428.48(H) × 803.52(V)
	Resolution (HxV)	3840(H)x2160(V)
	Pixel Pitch	0.372 mm(H) × 0.372 mm(V)
	Back Light Unit	DLED
	Response Time	8ms
	Refreshing Frequency	60Hz
	Display Color	1.07B(10bit)
	Brightness （typ）	500 cd/m2
	Brightness （min）	450 cd/m2
	Contrast Ratio（typ）	1200:1
	High Haze	Yes, Haze 25%
	Viewing Angle	178°
	Life Time	50000 Hours
	Display Orientation	Landscape & Portrait
	Operation Time	7 daysx24 hours
Connectors	**HDMI IN**	3(HDMI 2.0)
	HDMI Output	1(HDMI Daisy chain,Up to 3*3)
	Coaxial/Optical Output	Optical*1
	Audio Output	1,3.5mm
	USB 2.0	1 (F/W update / Media Play)
	USB 3.0	1 (F/W update / Media Play)
	RS232	1
	LAN(RJ45)((10M/100M/1000M))	2(IN/OUT)
	USB Type-C	1(DP1.2,PD 65W,Network Sharing(100M))
System	**System Version**	Android 11
	CPU	A55*4
	GPU	MaliG51 MP2
	RAM	4GB
	ROM	32GB
	UI	4K
Audio	**Speaker Type**	Built-in Speaker
	Power	2x10W
Slot	**OPS Slot**	Yes, 80 Pin OPS
	WIFI Slot	Yes, included
Mechanisms	**Bezel width(T/L/R/B) mm**	15.9/15.9/15.9/15.9
	Structure	Metal Frame Metal Rear cover
	Key Location & Number	Back physical keys, 7
	Handle	2
	Dimension (L*W*H) mm	1463.3x838.3x81.6
	Thickness (W/ wall mount) (mm)	101.4(WIB9080A)
	Wall-hanging Screw	M8*25mm
	VESA (Wall mounting Size)	600x400mm
	Dimension(package) L*W*H	1620*208*942mm
	Net Weight(kg)	25,4
	Gross Weight(kg)	33,3
Power	**Power Requirements**	100-240V~ 50/60Hz
	Standby Power	≤0.5W
	Power Consumption(Typ)	165W
	Power Consumption(Max)	335W
Accessories	**Power Cord By Region**	3M*1
	Remote Control	1 pcs
Environmental Conditions	**Operation Temperature**	0℃ - 40℃
	Operation Humidity	10% - 90%
	Storage Temperature	-20℃ -60℃
	Storage Humidity	10% - 90%
	Altitude Below	Below 5000 meters

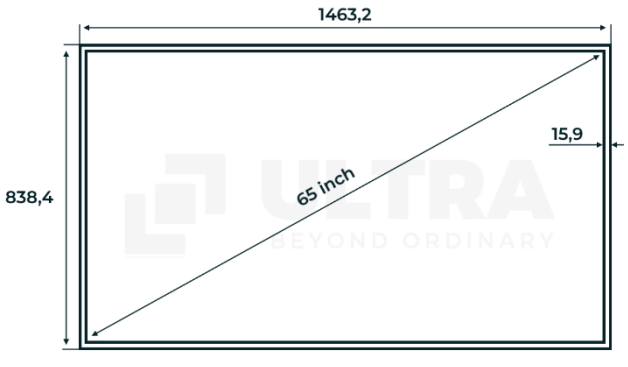


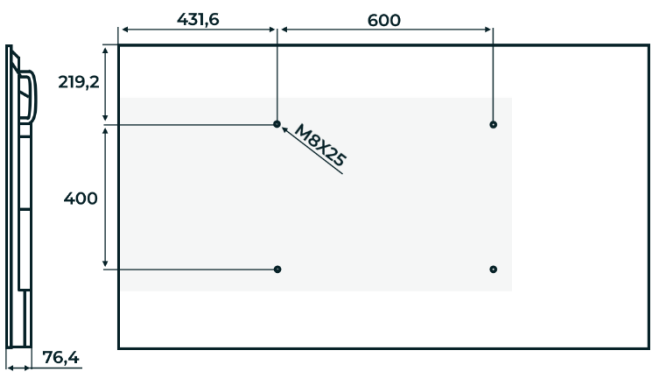


ULTRA
BEYOND ORDINARY

Product Specifications
ULTRA Mira 75 inch

Display	**Size**	75"
	Screen Type	LCD
	Aspect Ratio	16:9
	Display Area (HxV)mm	1649.664(H) × 927.936(V)
	Resolution (HxV)	3840(H)x2160(V)
	Pixel Pitch	0.4296mm(H) × 0.4296 mm(V)
	Back Light Unit	DLED
	Response Time	8ms
	Refreshing Frequency	60Hz
	Display Color	1.07B(10bit)
	Brightness （typ）	500 cd/m2
	Brightness （min）	450 cd/m2
	Contrast Ratio（typ）	1200:1
	High Haze	Yes, Haze 25%
	Viewing Angle	178°
	Life Time	50000 Hours
	Display Orientation	Landscape & Portrait
	Operation Time	7 daysx24 hours
Connectors	**HDMI IN**	3(HDMI 2.0)
	HDMI Output	1(HDMI Daisy chain,Up to 3*3)
	Coaxial/Optical Output	Optical*1
	Audio Output	1,3.5mm
	USB 2.0	1 (F/W update / Media Play)
	USB 3.0	1 (F/W update / Media Play)
	RS232	1
	LAN(RJ45)((10M/100M/1000M))	2(IN/OUT)
	USB Type-C	1(DP1.2,PD 65W,Network Sharing(100M))
System	**System Version**	Android 11
	CPU	A55*4
	GPU	MaliG51 MP2
	RAM	4GB
	ROM	32GB
	UI	4K
Audio	**Speaker Type**	Built-in Speaker
	Power	2x10W
Slot	**OPS Slot**	Yes, 80 Pin OPS
	WIFI Slot	Yes, Included
Mechanisms	**Bezel width(T/L/R/B) mm**	15.9/15.9/15.9/15.9
	Structure	Metal Frame Metal Rear cover
	Key Location & Number	Back physical keys, 7
	Handle	2
	Dimension (L*W*H) mm	1685.6x963.7x81.6
	Thickness (W/ wall mount) (mm)	101.4(WIB9080A)
	Wall-hanging Screw	M8*25mm
	VESA (Wall mounting Size)	800x400mm
	Dimension(package) L*W*H	1863×225×1090mm
	Net Weight(kg)	34,7
	Gross Weight(kg)	48,2
Power	**Power Requirements**	100-240V~ 50/60Hz
	Standby Power	≤0.5W
	Power Consumption(Typ)	235W
	Power Consumption(Max)	425W
Accessories	**Power Cord By Region**	3M*1
	Remote Control	1 pcs
Environmental Conditions	**Operation Temperature**	0℃ - 40℃
	Operation Humidity	10% - 90%
	Storage Temperature	-20℃ -60℃
	Storage Humidity	10% - 90%
	Altitude Below	Below 5000 meters

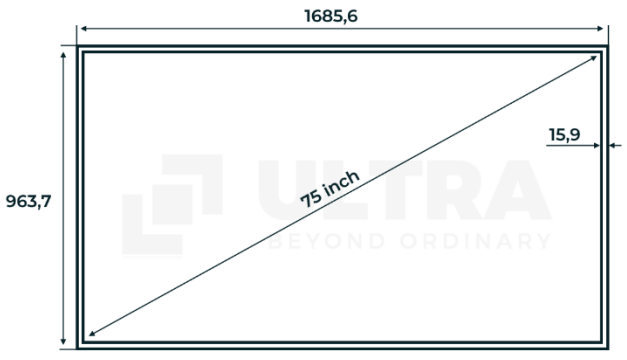

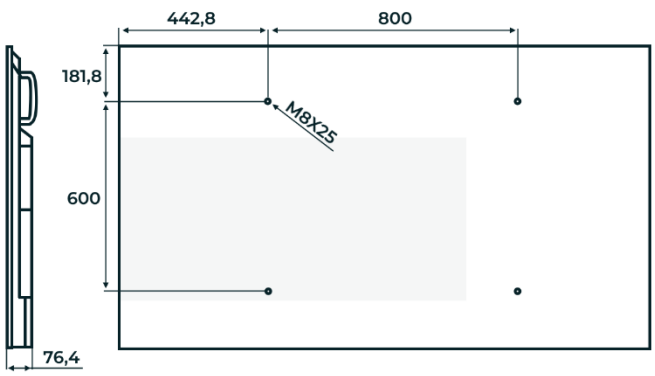



ULTRA
BEYOND ORDINARY

ULTRA
BEYOND ORDINARY

Product Specifications
ULTRA Mira 86 inch

Display	**Size**	86"
	Screen Type	LCD
	Aspect Ratio	16:9
	Display Area (HxV)mm	1895.04(H) × 1065.96(V)
	Resolution (HxV)	3840(H)x2160(V)
	Pixel Pitch	0.4935mm(H) × 0.4935mm(V)
	Back Light Unit	DLED
	Response Time	8ms
	Refreshing Frequency	60Hz
	Display Color	1.07B(10bit)
	Brightness （typ）	500 cd/m2
	Brightness （min）	450 cd/m2
	Contrast Ratio（typ）	1200:1
	High Haze	Yes, Haze 25%
	Viewing Angle	178°
	Life Time	50000 Hours
	Display Orientation	Landscape & Portrait
	Operation Time	7 daysx24 hours
Connectors	**HDMI IN**	3(HDMI 2.0)
	HDMI Output	1(HDMI Daisy chain,Up to 3*3)
	Coaxial/Optical Output	Optical*1
	Audio Output	1,3.5mm
	USB 2.0	1 (F/W update / Media Play)
	USB 3.0	1 (F/W update / Media Play)
	RS232	1
	LAN(RJ45)((10M/100M/1000M))	2(IN/OUT)
	USB Type-C	1(DP1.2,PD 65W,Network Sharing(100M))
System	**System Version**	Android 11
	CPU	A55*4
	GPU	MaliG51 MP2
	RAM	4GB
	ROM	32GB
	UI	4K
Audio	**Speaker Type**	Built-in Speaker
	Power	2x10W
Slot	**OPS Slot**	Yes, 80 Pin OPS
	WIFI Slot	Yes, Included
Mechanisms	**Bezel width(T/L/R/B) mm**	15.9/15.9/15.9/15.9
	Structure	Metal Frame Metal Rear cover
	Key Location & Number	Back physical keys, 7
	Handle	2
	Dimension (L*W*H) mm	1931x1102x81.6
	Thickness (W/ wall mount) (mm)	101.4(WIB9080A)
	Wall-hanging Screw	M8*25mm
	VESA (Wall mounting Size)	800x600 mm
	Dimension(package) L*W*H	2110×225×1227mm
	Net Weight(kg)	43,2
	Gross Weight(kg)	60,8
Power	**Power Requirements**	100-240V~ 50/60Hz
	Standby Power	≤0.5W
	Power Consumption(Typ)	335W
	Power Consumption(Max)	505W
Accessories	**Power Cord By Region**	3M*1
	Remote Control	1 pcs
Environmental Conditions	**Operation Temperature**	0℃ - 40℃
	Operation Humidity	10% - 90%
	Storage Temperature	-20℃ -60℃
	Storage Humidity	10% - 90%
	Altitude Below	Below 5000 meters

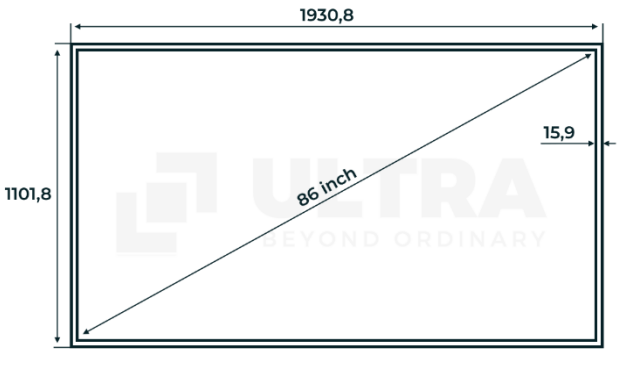

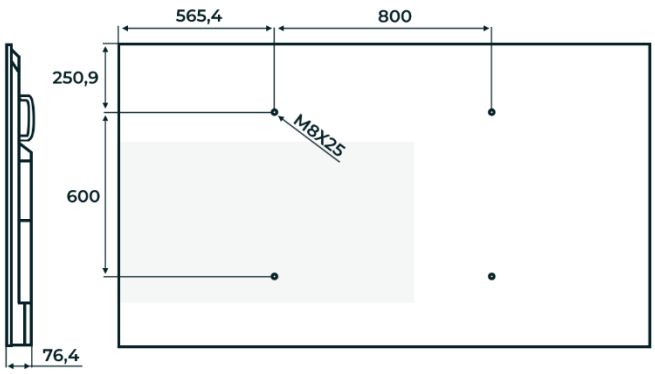



ULTRA
BEYOND ORDINARY

ULTRA
BEYOND ORDINARY

Product Specifications
ULTRA Mira 98 inch

Display	**Size**	98"
	Screen Type	LCD
	Aspect Ratio	16:9
	Display Area (HxV)mm	2158.848(H) × 1214.352(V)
	Resolution (HxV)	3840(H)x2160(V)
	Pixel Pitch	0.5622mm(H) × 0.5622mm(V)
	Back Light Unit	DLED
	Response Time	8ms
	Refreshing Frequency	60Hz
	Display Color	1.07B(10bit)
	Brightness （typ）	500 cd/m2
	Brightness （min）	450 cd/m2
	Contrast Ratio（typ）	1200:1
	High Haze	Yes, Haze 25%
	Viewing Angle	178°
	Life Time	50000 Hours
	Display Orientation	Landscape & Portrait
	Operation Time	7 daysx24 hours
Connectors	**HDMI IN**	3(HDMI 2.0)
	HDMI Output	1(HDMI Daisy chain,Up to 3*3)
	Coaxial/Optical Output	Optical*1
	Audio Output	1,3.5mm
	USB 2.0	1 (F/W update / Media Play)
	USB 3.0	1 (F/W update / Media Play)
	RS232	1
	LAN(RJ45)((10M/100M/1000M))	2(IN/OUT)
	USB Type-C	1(DP1.2,PD 65W,Network Sharing(100M))
System	**System Version**	Android 11
	CPU	A55*4
	GPU	MaliG51 MP2
	RAM	4GB
	ROM	32GB
	UI	4K
Audio	**Speaker Type**	Built-in Speaker
	Power	2x10W
Slot	**OPS Slot**	Yes, 80 Pin OPS
	WIFI Slot	Yes, Included
Mechanisms	**Bezel width(T/L/R/B) mm**	26/26/26/26
	Structure	Metal Frame Metal Rear cover
	Key Location & Number	Back physical keys, 7
	Handle	2
	Dimension (L*W*H) mm	2212.9×1268.4×79.4
	Thickness (W/ wall mount) (mm)	101.4(WIB9080A)
	Wall-hanging Screw	M8*25mm
	VESA (Wall mounting Size)	800x600 mm
	Dimension(package) L*W*H	2360×280×1425mm
	Net Weight(kg)	69,4
	Gross Weight(kg)	90,3
Power	**Power Requirements**	100-240V~ 50/60Hz
	Standby Power	≤0.5W
	Power Consumption(Typ)	340W
	Power Consumption(Max)	515W
Accessories	**Power Cord By Region**	3M*1
	Remote Control	1 pcs
Environmental Conditions	**Operation Temperature**	0℃ - 40℃
	Operation Humidity	10% - 90%
	Storage Temperature	-20℃ -60℃
	Storage Humidity	10% - 90%
	Altitude Below	Below 5000 meters

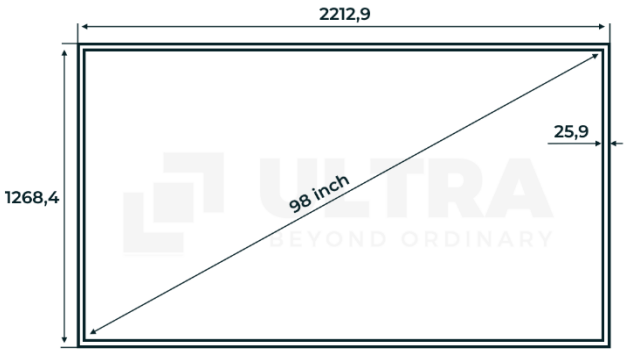

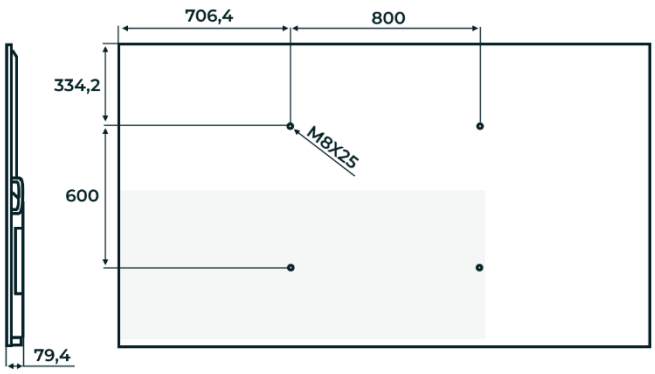

ULTRA
BEYOND ORDINARY